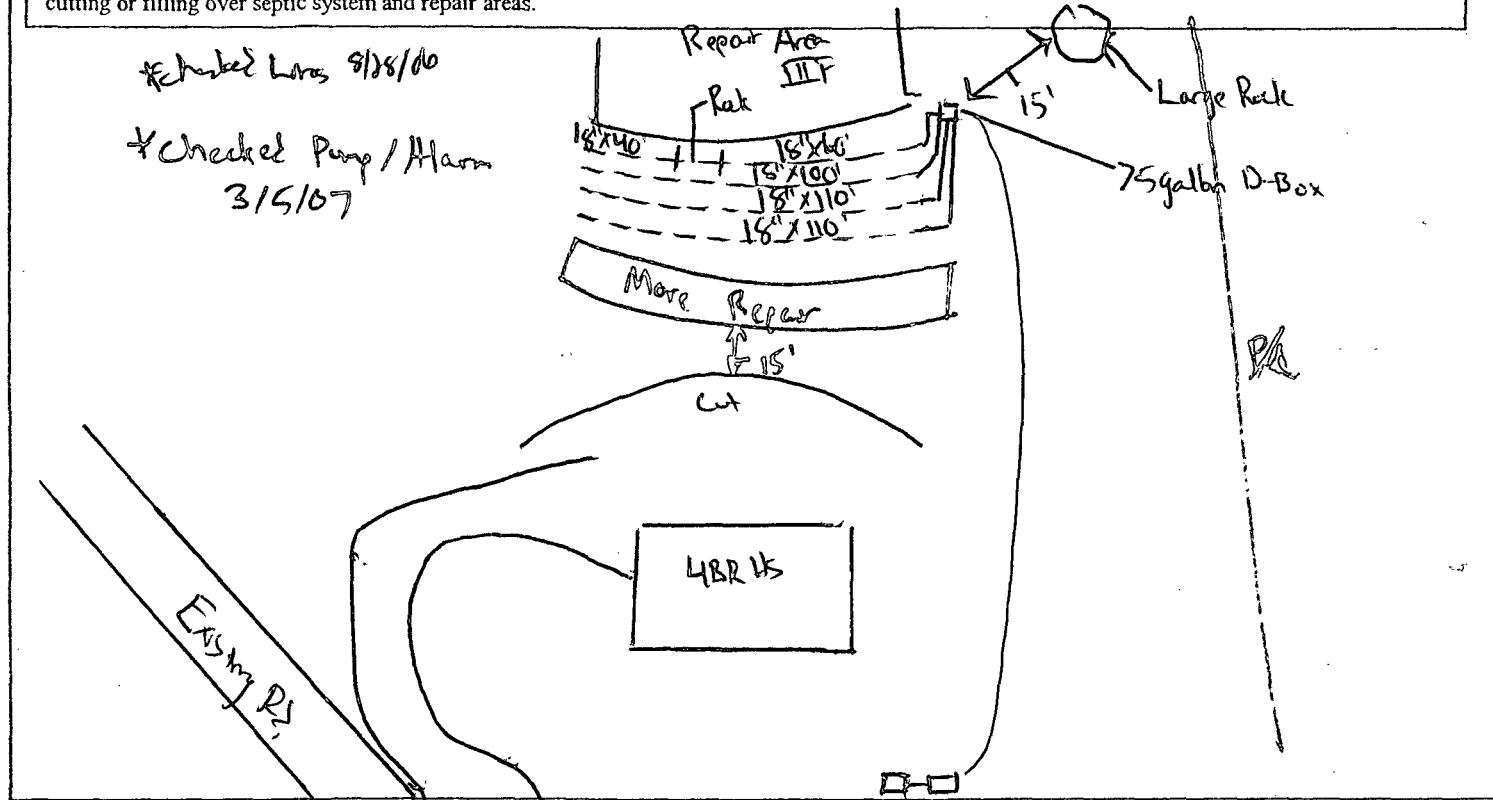


Case Number: WLS 2005-03548BUNCOMBE COUNTY HEALTH CENTER
ENVIRONMENTAL HEALTH SERVICES (828-250-5000)
OPERATIONS PERMITPIN: 966509161573000Property Owner: Jason Sparks Property Location: Pinner's Cove Application Date: 11/21/05Directions: Hwy 25 south @ Mills Gap @ Pinner's Cove Rd. (R) Glen MerrillSubdivision: _____ Phase/section: _____ Lot# 9 Installer: Mitchell LuskWater Supply: ☐ Private Well ☐ Spring ☐ Shared Well ☒ Community Min. Required Separation Distance 16' Installed? ☐ Yes ☒ No

Conditions: 1) Pump septic tank every 3 to 5 years. 2) Divert all gutters and other surface water, away from septic system and repair areas. (3) No cutting or filling over septic system and repair areas.

Operations Permit For: ☒ New System ☐ Repair ☐ Revision Drawings, plans, conditions, etc. attached? ☒ Yes ☐ NoSystem Approved For: ☒ House ☐ Mobile Home (☐ single ☐ double) Bedrooms: 4 Basement: ☒ Yes ☐ No Basement Plumbing: ☒ Yes ☐ No☐ Multiple Unit Dwelling: No. of Units _____ Number of Bedrooms per unit _____ ☐ Business No. Employees: _____ No. Shifts: _____Operation Description: _____ Industrial Waste: Yes ☐ No ☐Approved Installation Specifications: Total Design Flow: 400 (GPD) LTAR: 0.45 System Classification: Type I, II, III, IV, V, VIPump System Required: ☒ Yes ☐ No Pump Specification Pump Make: _____ Model: _____ Serial No. _____Trenches: Length: 430 ft No. of Trenches 4 Width: 18" Spacing: 7.5 ft Depth: 20 in (lower sidewall) Stone Depth: _____ inDistribution: ☒ Equal Gravity ☐ Pressure Manifold ☐ Serial ☐ Dams/Step Downs Tank Size: Septic: 1000 (gallons) Pump Tank: 1000 (gallons)System Description: ☐ Prefabricated Panel Block ☐ Conventional ☒ Large Diameter Pipe ☐ Chamber ☐ Expanded Polystyrene Aggregate ☐ Other _____

Comments: _____

Inspected by: Chris Lusk Date: 8/28/06 Issued To: Albert Sparks Date: _____

The system has been installed in accordance with state sewage rules. Approval does not guarantee the system will function satisfactory for any given time.